

Name _____ Date _____ Track / City _____ Event _____

Front Suspension

Upper Spacer: _____ mm

Shock Tower: _____

Toe: In Out _____ °

Toe Rod: _____

Front Bulkhead Weight Placement:

None

Bulkhead Inside _____ oz _____ g

On the skid plate _____ oz _____ g (*1oz = 28g)

4.8mm Ball Stud:

UM128 (Std)

UMW508 (+2mm High Mount)

4.8mm Ball Stud Spacer: _____ mm

Camber: _____ °

AI Steering Support:

None

UMW724

Axel Spacer:

Out _____ mm

In _____ mm

Wheel Hub:

UM569/Std

UM506

Caster Block Position:

In (Wide/Std)

Out (Narrow)

Caster:

25°

30°

Caster Block:

0.5 0°

1.0 2°

None 4°

Spacer:

A (UM502) B (UMW722/Bra)

B (UMW721/Std) B (UMW723/Alu)

4.8mm Ball Stud:

LA246 (-1mm Low Mount)

97050M (STD)

Ackermann Steer Spacer: _____ mm

UMW701 Aluminum ST Plate

UMW702 Aluminum Crank Arm

Bump Steer Spacer: _____ mm

Axel Height Spacer:

_____ mm

_____ mm

Knuckle:

UM763 (Std)

UM714

Wheelbase:

F _____ mm R _____ mm

Comments: _____

Rear Suspension

Shock Tower: _____

Anti-Squat: _____ °

4.8mm Ball Stud:

UM129

UMW508 (+2mm High Mount)

97050M

UM128 (Std)

Upper Spacer: _____ mm

RR: _____

Mid: _____

Susp Holder Spacer:

F 0.5 1.0 None

R 0.5 1.0 None

Type-B (UM519)

Type-B2 (UM519-2)

Camber: _____ °

Universal Swing Shaft:

Rear Hub Carrier:

0° Type-B (UM519)

0° Type-B2 (UM519-2)

0° Alu (UMW704-0)

0.5° Alu (UMW704-05)

1° Alu (UMW704-1)

Drive Hub:

4mm (TFW113)

4.5mm (LAW30GM/Std.)

5.2mm (UMW523)

Axle Spacer:

Out _____ mm

In _____ mm

Wheelbase:

F _____ mm R _____ mm

Wheelbase:

F _____ mm R _____ mm

Comments: _____

Lower Susp Holder:

Plastic

RF RF2L RF2

Option

UMW511GM (RF/Alu)

(Opt/Adjustable)

UMW705 (RF/Alu) _____ Block

UMW725 (RF-MID/Bra) _____ Block

(Opt/Adjustable)

UMW706 (RR-RWD) _____ Block

UMW707 (RR-MID) _____ Block

Sway Bar: None _____ mm

Differential

Gear: _____


Ball: _____

Shocks


	Front	Rear
Piston:	_____	_____
Oil:	# _____	# _____
Spring:	_____	_____
Limiters:	In _____ mm	In _____ mm
	Out _____ mm	Out _____ mm
Length (A):	_____ mm	_____ mm
O-Ring:	_____	_____
Shock Top Type:	<input type="checkbox"/> Alu (UM719/Std)	<input type="checkbox"/> UM753-1
Ball End Type:	Front <input type="checkbox"/> S <input type="checkbox"/> M <input type="checkbox"/> L	Rear <input type="checkbox"/> S <input type="checkbox"/> M <input type="checkbox"/> L

Am0 - V1

Battery placement

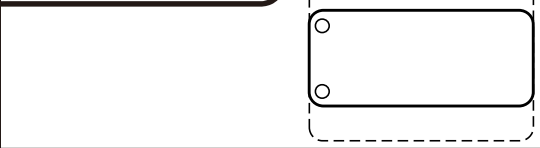

Chassis

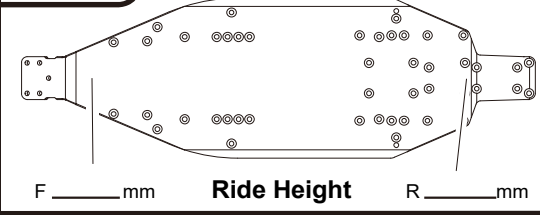

Transmission

Rear Motor

Mid-Ship 3 Gear

Mid-Ship 4 Gear

Mid-Ship Laydown

Battery Type

Straight

Separate

Short

Type _____

Track Condition

<input type="checkbox"/> Smooth	<input type="checkbox"/> Sandy
<input type="checkbox"/> Bumpy	<input type="checkbox"/> Soft Dirt
<input type="checkbox"/> Low Traction	<input type="checkbox"/> Grass
<input type="checkbox"/> Med. Traction	<input type="checkbox"/> Blue Groove
<input type="checkbox"/> High Traction	<input type="checkbox"/> Clay
<input type="checkbox"/> Wet	<input type="checkbox"/> Dusty
<input type="checkbox"/> Dry	<input type="checkbox"/> _____

Wing

UM767 (Std)

Step 2.0 - Straight

Step 3.0 - Round

Other _____

_____ mm

Lip: _____ mm

Tire

	Front	Rear
Tire	_____	_____
Insert	_____	_____
Wheel	_____	_____

Other

Motor: _____

ESC: _____

Ratio: _____

NOTES