



Name _____ Date _____ Truck / City _____ Event _____

Front Suspension:



Toe: In Out _____°
 Sus Mount: UM502
 UM567
 UM721

Upper Spacer: _____ mm




4.8mm Ball Stud:
 UM128
 UMW508 (+2mm High Mount)



Shock Mount:
 IN
 OUT



Caster Spacer:
 25° 0.5
 30° 1.0
 None None



Camber: _____°



Upper Spacer: _____ mm


Axle Spacer: Out _____ mm

Caster Block:
 IN (wide/Std)
 OUT (Narrow)

4.8mm Ball Stud:
 LA246 (-1mm Low Mount)
 97050M

Ackerman Steer Spacer: _____ mm

Bump Steer Spacer: _____ mm




Axle Height Spacer:
 Up
 Down


Wheelbase: Long Middle Short

Comments: _____

Rear Suspension:



UM788 UM706




Upper Spacer: _____ mm


Sus Holder Spacer:

F 0.5 1.0 None
 R 0.5 1.0 None

Anti-Squat: _____°
 Sway Bar: None _____mm




Upper Spacer: _____ mm



Wheelbase:

F: _____ mm
 R: _____ mm

Camber: _____°

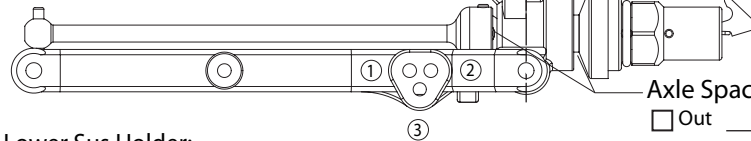

Lower Sus Holder:

Normal Aluminum(Opt)
 RF RF2 Front _____ Rear _____

Axle Spacer:
 Out _____ mm
 In _____ mm

Rear Hub
 0° Type-B (UM519)
 0° Type-B2 (UM519-2)
 0° Alu (UMW704-0)
 0.5° Alu (UMW704-05)
 1° Alu (UMW704-1)

Drive:


Rear Motor
 Midship Motor

Diff:

Gear Diff # _____
 Ball Diff _____

Shock:

| | Front | | Rear | |
|------------------|---|-------------------------------------|--|----------------------|
| Shock Piston: | _____ | _____ | _____ | _____ |
| Shock Oil: | # _____ | # _____ | # _____ | # _____ |
| Shock Spring: | _____ | _____ | _____ | _____ |
| Limiters: | in _____ out _____ | mm _____ mm _____ | in _____ out _____ | mm _____ mm _____ |
| Shock Length(A): | _____ mm | _____ mm | _____ mm | _____ mm |
| Shock Top Type: | <input type="checkbox"/> Normal | <input type="checkbox"/> Alu(UM719) | | |
| 5.8mm Ball End: | Front: <input type="checkbox"/> S <input type="checkbox"/> M <input type="checkbox"/> L | | Rear: <input type="checkbox"/> S <input type="checkbox"/> M <input type="checkbox"/> L | |



Chassis:

Battery Placement: _____ Front _____ Rear _____

Weight Placement
 No Screw
 Screw

F _____ mm Ride Height: R _____ mm

Track Conditions:

Composition: _____
 Surface: _____
 Traction: _____
 Comments: _____

Electronics:

Motor: _____
 Pinion/Spur: _____
 Battery: _____
 ESC: _____
 Radio: _____
 Servo: _____
 Throttle/Brake: _____
 E PA: _____ Expo: _____
 Initial brake: _____
 Drag brake: _____
 Throttle profile: _____
 Steering expo: _____
 Steering speed: _____

Body:

Material:

Screw: Steel Titanium
 Servo Horn: Normal Rigid(UM717)
 Pinion Gear: Steel Aluminium
 Shock Ring: O-ring X-ring Red Clear

Comment: _____

